


## Tools Prepared


(1)A Speed simulator

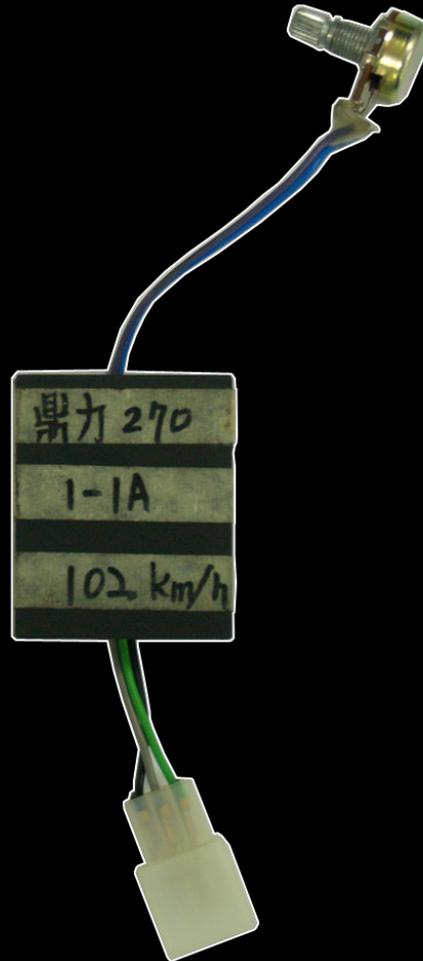

※The shape of your speed simulator could be different than above shows but the functions will be the same.

## Instruction(1/6)

(1)

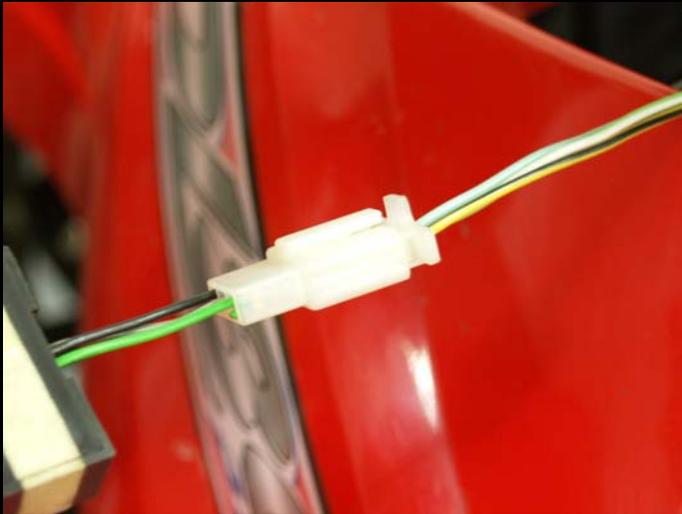

Connect the plug of simulator to speedometer as shows.

(2)



Use the speed simulator to make the speed reach between 115~120km/hr.

(3)



Turn the main switch off.

(4)



Press the left key on the speedometer.

## Instruction(2/6)

(5)



Keep pressing the left key and turn the main switch on.

(6)



Add to press the right key when "----" appeared on the meter.

(7)



When "INF-0" appears.

(8)



Loosen the left key.

## Instruction(3/6)

(9)



Then wait for above screen comes.

(10)



Add to press the left key.

(11)



When above screen comes, loosen both key and press the left key.

(12)



When above screen comes, press the left key.

## Instruction(4/6)

(13)



When above screen comes, press the left key.

(14)



When above screen comes, press the right key twice and then "OF" flash, press the left key.

(15)



When "ON" appears, press the right key and then "4" flash, press the left key.

(16)



When above screen comes, press the left key.

## Instruction(5/6)

(17)



When above screen comes, press the left key.

(18)



When above screen comes, press the left key.

(19)



When above screen comes, press the left key.

(20)



When above screen comes, press the left key.

## Instruction(6/6)

(21)



When above screen comes, press the right key then "End" flash, press the left key.

(22)



When above screen comes, the procedure is completed!

(23)



Now you can press the right key to show the temperature.

(24)



And press right key again to go back to odometer.